

Features


- 1/3" 520K Color IT-CCD
- Register control via COXITRON (Pelco)
- Digital Clamp (with Anti-smear)
- ACE(Digital WDR)
- De-Fog
- Edge Adaptive 2-D Digital Noise Reducer
- DC IRIS
- GPIO support
- Smart IR LED controller(Auto dimming)
- Hue controller (8-Way)
- Support True Day & Night (ICR)



Specifications

Signal Format	NTSC	PAL
Image Device	1/3 " 520K Color IT-CCD	
Resolution	700 TV Lines	
Total Pixels	518K pixels	607K pixels
Effective Pixels	482K pixels	568K pixels
Shutter Speed	1/60 ~ 120,000sec	1/50 ~ 120,000sec
Sync. System	Internal	
S/N Ratio	More Than 50dB	
Iris Control	Electronic, DC Iris	
Video Output	Composite (1.0Vp-p/75 Ohm)	
Temperature	-10℃ ~ +60℃	
Power supply	DC 12V(±10%)	
Humidity	RH 85% MAX	
Weight	Approx. 6g	
Power Consumption	Max.1.5W	
Size	42 x 42mm	

Connector Pin map

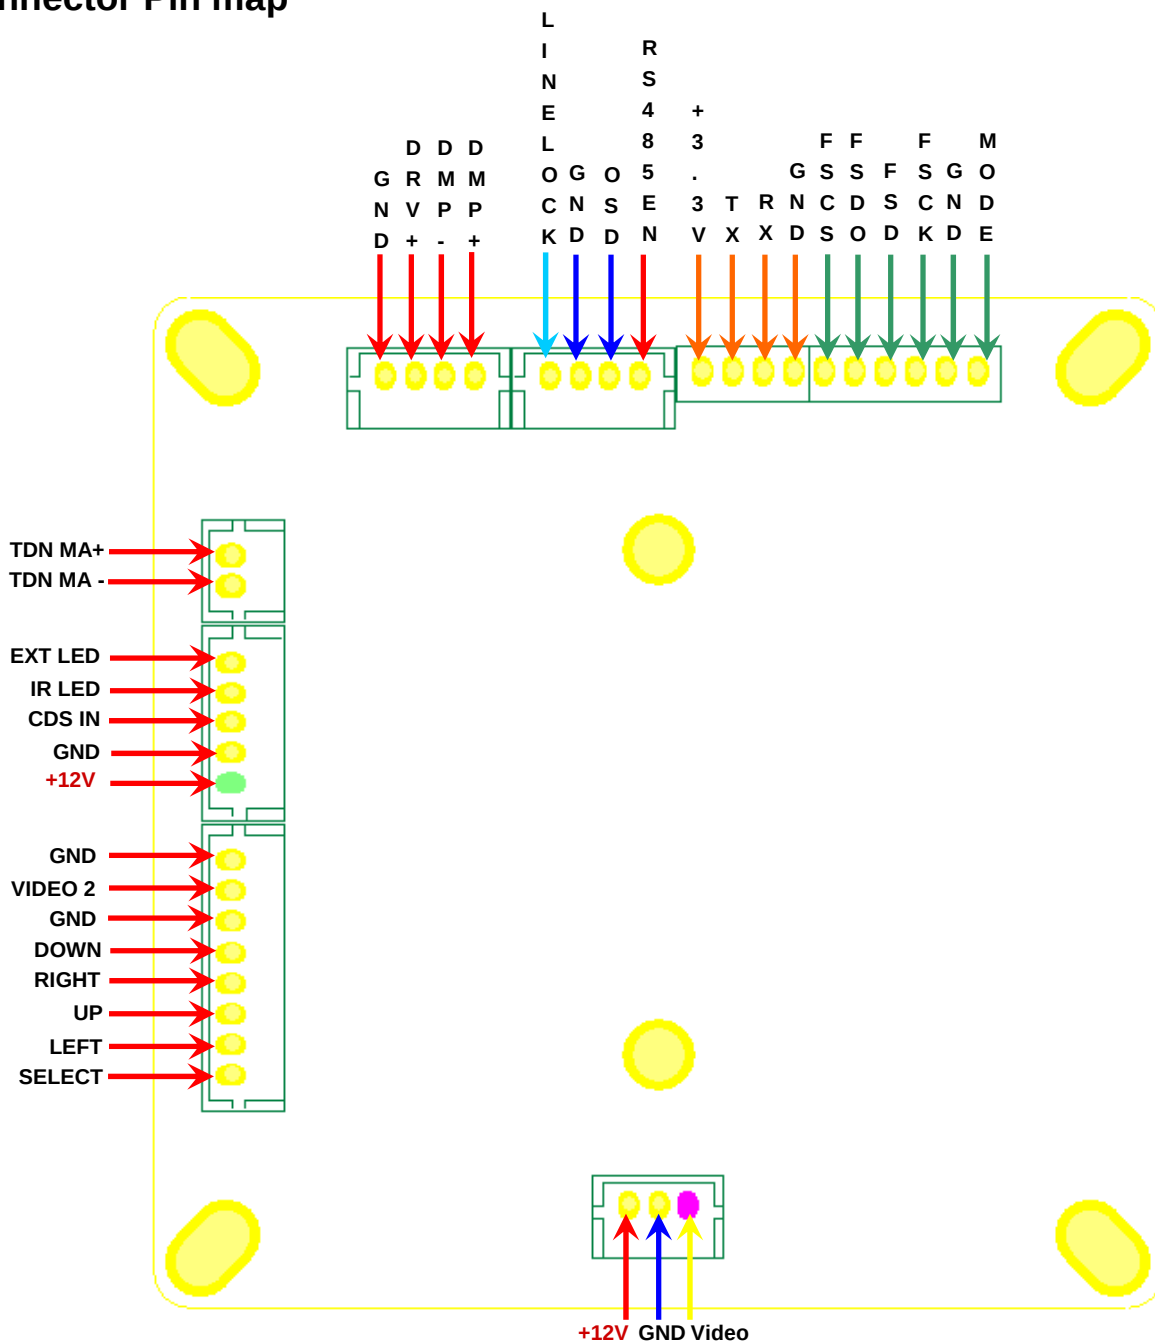

Address

Rm. 813, Woorim W-CITY 618, Sampyeong-dong, Bundang-Gu, Seongnam-si, Gyeonggi-do, Korea